


Length Automatic Control Automatic Packer (SERVO-TYPE) PB-NC-2RS (Powder)

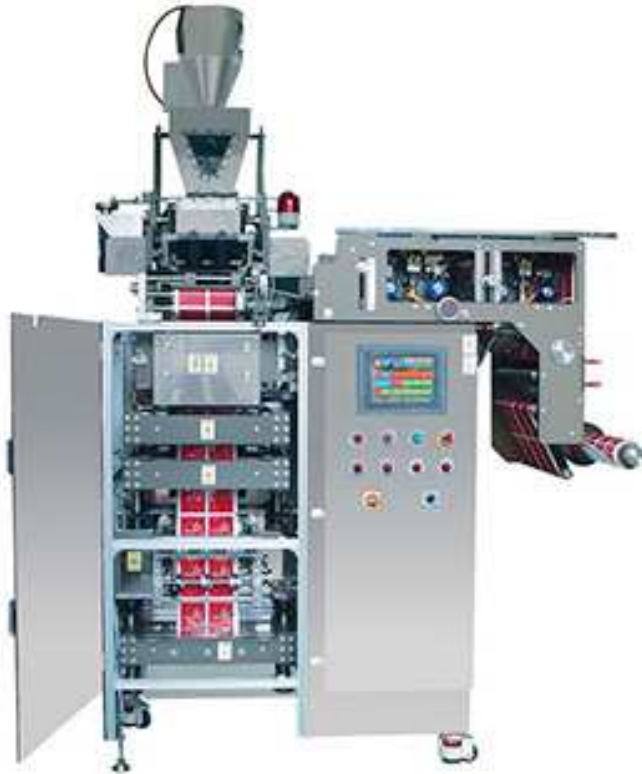

Feature

- Residual oxygen: Check those that come below (0.1 to 2% setting) for packing.
- The width and length of a product can be adjusted and the weight is adjusted via touching.
- The length of a product is adjusted automatically. Likewise, the secondary seal bar and cutting position can be adjusted automatically.
- The machine conducts the first and secondary sealing by cam, generating less noise.
- A flashing light is turned on 2 minutes before the film is finished. When the films are completely consumed, the machine will stop at its designated position.
- Ink Jet Printer and Thermal Carbon Paper Printer can be installed for the Sealing Device.

Contents

Yeast, powder, fine granules, granules, other powder types, powdered milk, medical supplies and so on

Packing material

AL+PE, OPP+PE, NY+PE, Other Packing Papers Available for Heat Sealing

Specification

Packing row	2 Row (production option)
Capacity	30~80 EA/min (on 2 row)
Packing size	W : 40~125 × L : 60~200mm (option feature)
Filling capacity	4~150g (option feature)
Electric Power	220/380V, 3P, 50/60Hz
Compressed Air	5~7kgf/cm ² , 80ℓ/min