


Carton Opening Machine M-KAC-A01

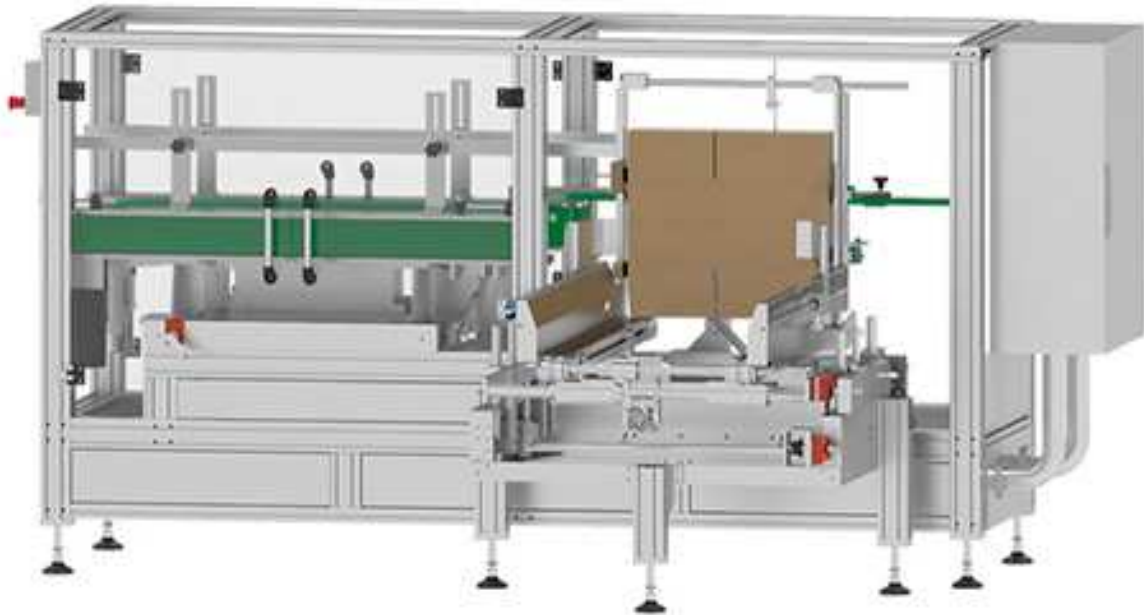

General Description

- Advanced easy-to-use Beckhoff/Omron brand PLC control system
- Touch screen 7" operator panel or integrated into the cartoning machine
- Manual size adjustment for different box sizes
- Automatic, with box top cover closure
- With side drag straps, Total of 2
- Drag belt speed 21 meters/minute
- Top and Bottom K12 taping dispensers (K11 taping dispenser support is available)
- Height adjustable aluminum feet between 480-820mm for working height
- Speed regulator on top cover closing pistons
- Gradual top cover closure with 2 pistons
- Closed enclosure in CE norms to ensure occupational safety and environmental cleanliness
- Easy change in a short time
- Ease of maintenance and service

Technical Specifications

- System: Linear
- Working Principle: Stop and Go
- Construction: Chassis is aluminum, other visible surfaces are anodized aluminum
- Control unit: Beckhoff
- Packaging: RSC parcel

- Box width: 300 mm (Can be designed according to customer's product)
- Box length: 400 mm (Can be designed according to customer's product)
- Box height: 350 mm (Can be designed according to customer's product)
- Electricity requirement: 380V, 50Hz, 3 Phase
- Air requirement: 6-8 bar
- Energy consumption: 1 kW
- Air consumption: 800 lt/min
- Weight: ~500kg
- Capacity: 10-15 BPM