


GPS100-1A

注射器旋杆贴标机

Plunger rod screwing and labeling machine for filled and closed syringes

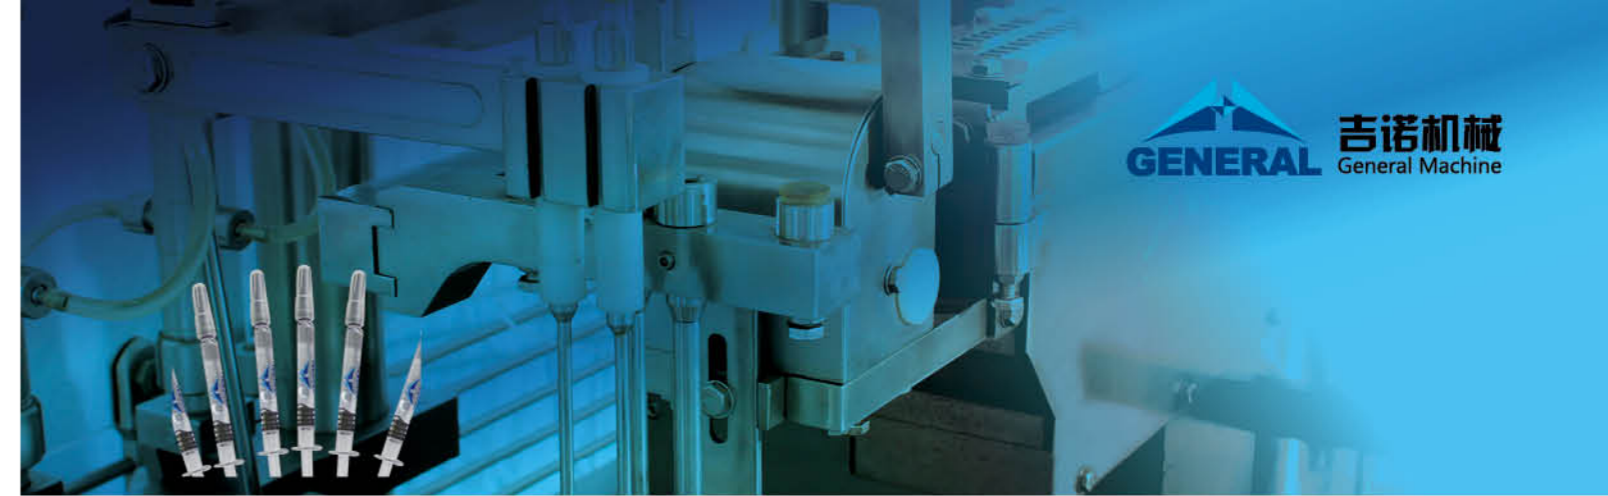

适合对预灌封注射器及非标塑料注射器进行加杆和贴标。
To screw plunger rods to filled and closed syringes and place labels.

主要技术参数 Main Technical Parameter

注射器容量 Syringe volume	任意规格 Any size
贴标精度 Labeling accuracy	≤ ±0.2mm
速度 Speed	1200~3600 支 / 小时 (Pcs/Hour)
总功率 Total power	3.2Kw
压缩空气 Compressed air	0.55~0.75Mpa 20L/S
外形尺寸 (长 × 宽 × 高) Overall dimension (L × W × H)	1900 × 1300 × 1800 mm
主机质量 Weight of basic machine	750Kg

本机功能及特点

Functions and features

- 自动上灌装加塞后的注射器，自动上推杆，自动旋推杆，自动贴标。
- 可选配层流罩。
- 本机可单机使用，也可组成整套流水线。
- Automatically loading the filled and closed syringes to the machine, automatically loading plunger rods, automatically screw plunger rods to the syringes, automatically place labels to the filled and closed syringes with plunger rods.
- Can be equipped with LAF hood.
- This machine can be used as a individual machine, it can also form a multifunctional production line.

