


## SB800W High-speed Reciprocating Four-side Sealing Packing Machine

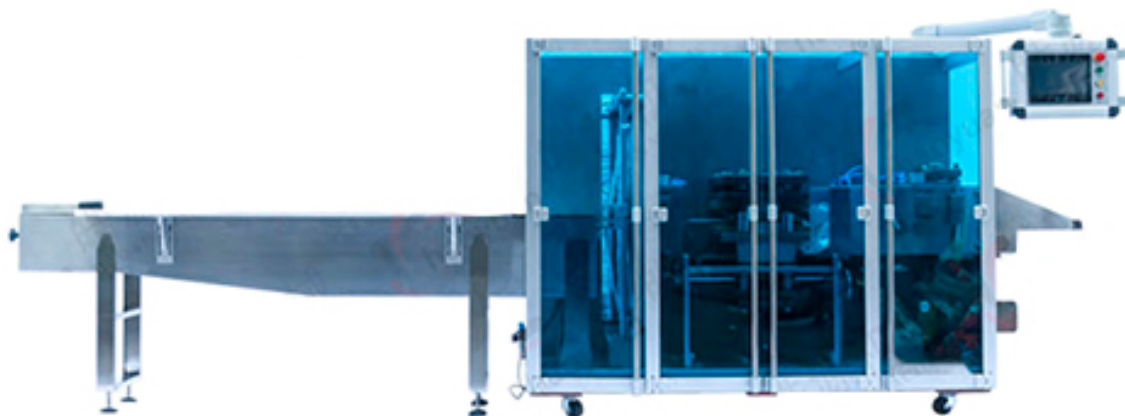

Programmable control: PLC programmable controller is used to program the whole machine. Touch screen display: host speed, set bag length, actual bag length, compensation amount, output will be displayed on the screen at a glance. Automatic adjustment of bag length: the change of package length can be set directly on the touch screen, and the length can be adjusted automatically by computer program, which is very convenient and fast. Two way compensation benchmarking: imported photoelectric detection color code, automatic tracking by PLC computer program combined with two-way compensation mechanism, makes benchmarking fast and accurate. Left and right photoelectric rectification: make both sides of the bag aligned, flat and beautiful. Waste collection device: driven by magnetic powder control, it can balance the tension of packaging materials and make the whole machine run stably. The edge sealing pressure device ensures the sealing effect of the product. Road sealing extension and edge sealing reinforcement

### Technical Parameters

型号	Model	SB800W
生产能力	Production capacity	80-160包/分 Bags/min (视产品规格而安 Vary with different specifications)
包装膜宽度	Film width	300-550
制袋长度	The bag length	100-200mm
产品尺寸	Product size	最宽(Max.width)200mm, 最高(Max.height)20mm
机器重量	Weight	约(about)1000kg
额定电压	Rated voltage	330V/50HZ
总功率	Total power	4.8 kw
外形尺寸	Overall dimension	4600X1775X1505mm