


GPK-60 Automatic Carton Erector

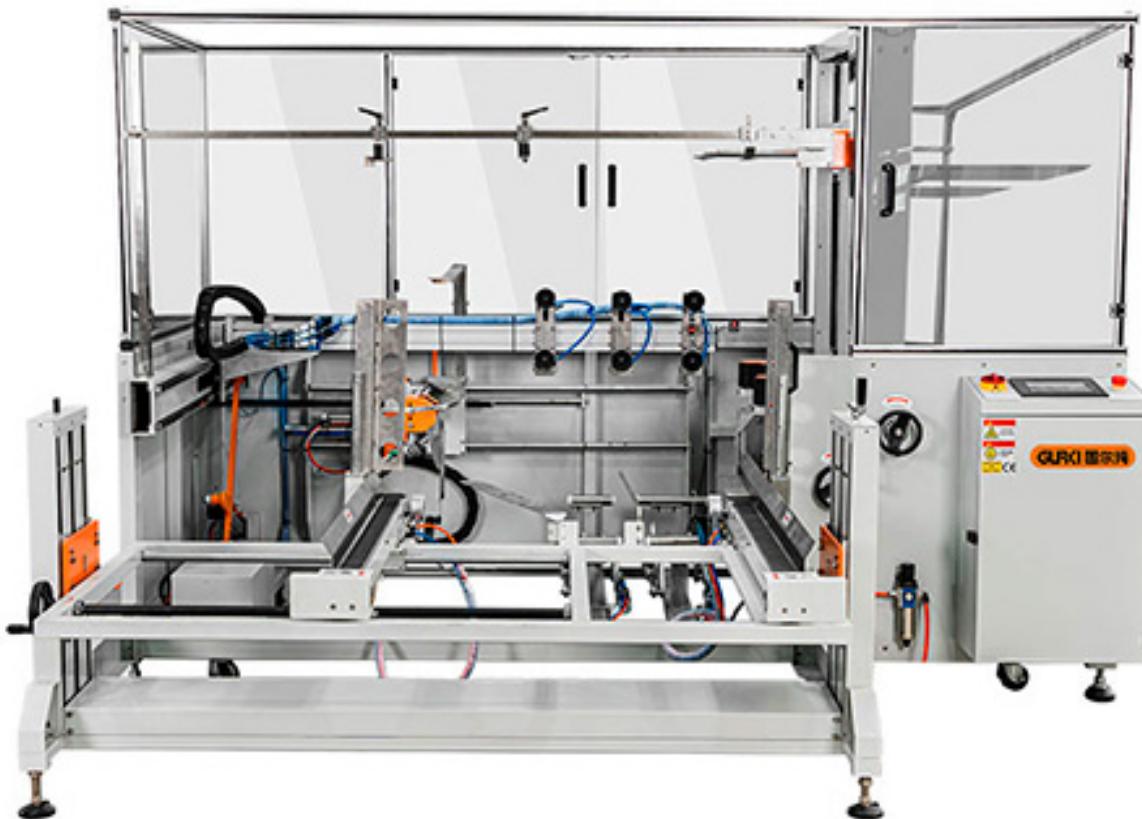

The automatic carton erector changes the traditional trough design and adopts durable parts and electrical components. The accessories have stable performance, strict structural design, and no vibration during operation. It uses a horizontal trough design with a cardboard capacity of up to 100. At the same time, the enlarged carton opening design can open cartons up to 80cm long. The carton sealing and bottom folding are completed in one go. It is widely used in food, medicine, beverage, tobacco, daily chemicals, electronics and other industries.

FEATURES

- Replace tape quickly: Equipped with protective door, replacing tape conveniently and safely as the door open.
- Push carton board automatic buckle: Material trough fixed bracket with push carton board automatic buckle, lock material trough which is convenient for user.
- Mechanism of folding front and rear board: Upgraded mechanism of folding front and rear board, cartons can be formed faster, stable and endurable.
- Siemens PLC: The internal electric circuit adopts anti-jamming technology and Siemens control program, which can control position accurately and work stable for long time.
- Endurable conveyor belt: Using endurable conveyor belt with strong friction which can transport steadily.
- Automatic alarm: When tape broken or used up, the alarm will make sounds automatically. It's convenient for user to change and adjust in time.

SPECIFICATIONS

MODEL	GPK-60
Carton Opening Speed	6-8 cases/min
Carton Size	L360-800mm*W200-600mm*H250-600mm
Power Supply	220v 50/60HZ
Power	240W
Adhesive Tape Width	55-72mm (Choose one type)
Carton Storage Quantity	80-100pcs (1000mm)
Air Consumption	450NL/min
Air Compressing	6-8kg/cm ³
Table Height	780+30 mm
Machine dimension	L2850×W2550×H1950mm
Machine Weight	900KG