


NEWPACK

Machine Can Be Used to Package the 3 and 4 Side Sealed Small Sachets HS-180

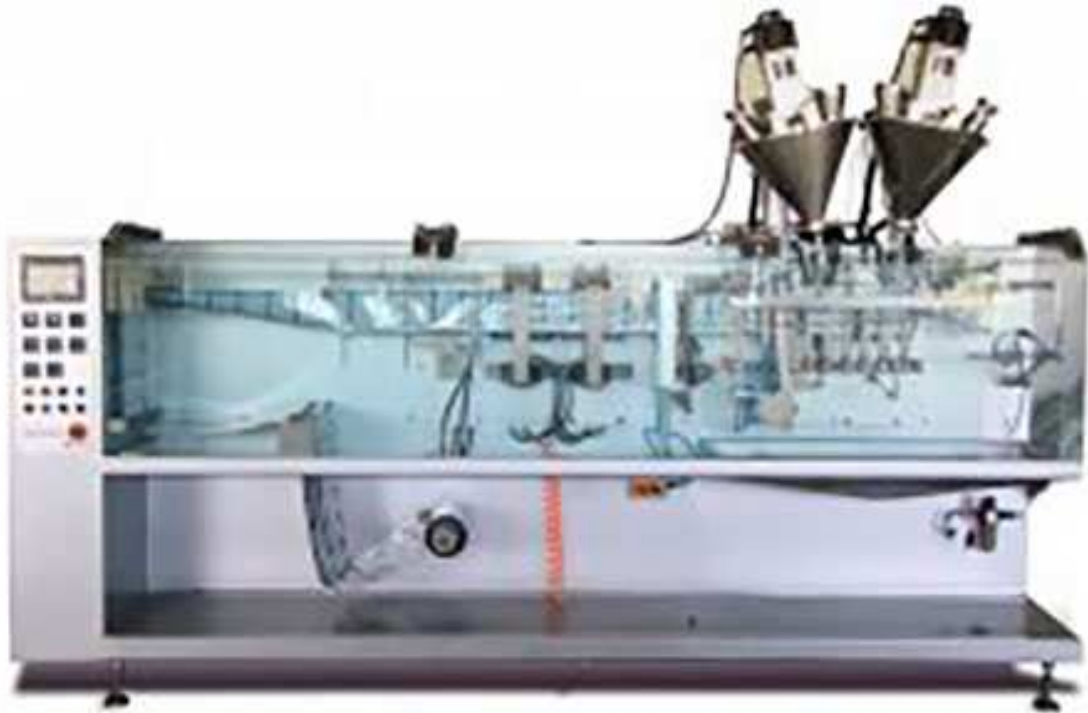

This machine is versatile and suitable for medium and small 3/4 flat pouches, it is used widely used to pack power in lines of food, medical, chemical and personal care. Packages produced by this machine are succinct and pretty.

Technical details:

HS-180		
Machine operation	HFFS	Horizontal formfill and seal
Technology concept	Pouch origin	Form the reel
	Pouch transport system	Intermittent
Construction	Machine frame	Stainless steel
	Except internal mechanisms	Stainless steel SUS304 and Aluminum alloy
	Parts in contact with product	Stainless steel SUS316L
Reel	Reel diameter	400mm
	Reel Width	440mm
	Reel core	76mm
Filling stations		2 (with 2 heads)
Product production		Optional gas flushing (N ₂) or steam injection
	Machine dimensions	Length×width×height
Machine weight		1200Kg
Pouch dimensions	Length×width×height	Minimum: 80mm×100mm

		Maximum: 180mm×220mm
Packaging speed		Maximum:90ppm
Pouch volume		Maximum:400c.c
Consumption	Electrical	8.0kw
Electrical Data	Air consumption	50L/min 0.6Mpa
		200-415V/50-60Hz/N+G
		(According to customer requirements customization)
Noise level		≤70dB
Safety		CE standards