


TT-400™

VERTICAL CARTONER




Built solid

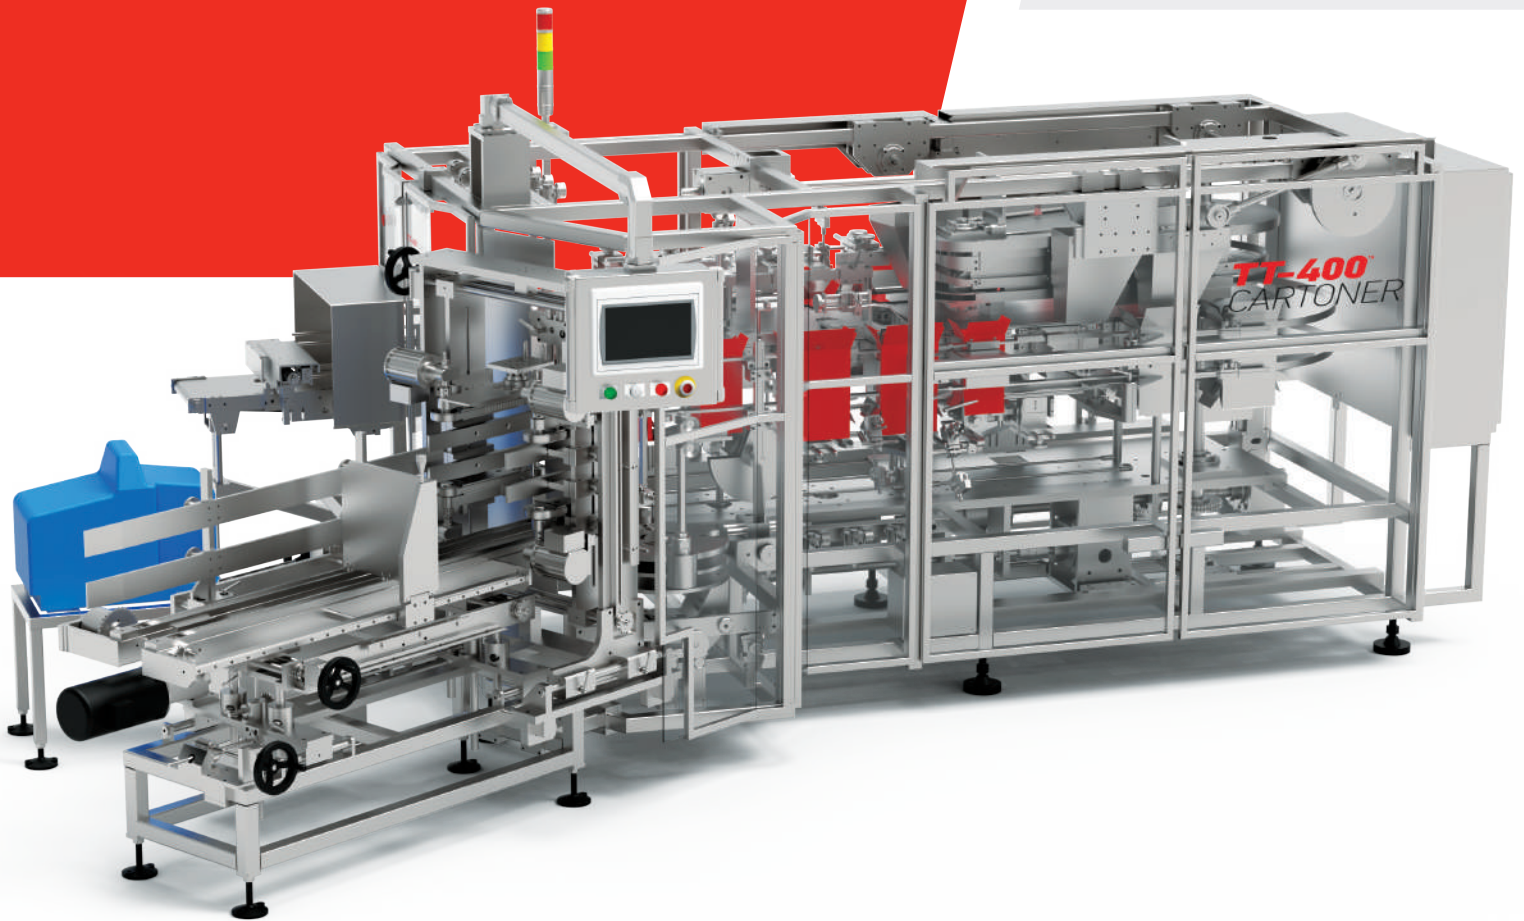

TT 400 is a continuous motion vertical cartoner that can reach speeds of up to 750 CPM. It is available with the patented UltraTrack high-speed volumetric cup filler, or with MemoryTrack for computer scale interface. TT-400 is also suitable for lined cartons - a substitute for cumbersome and outdated bag-in-box formatting.

KEY FEATURES


- **COMPACT FOOTPRINT**
- **QUICK CHANGEOVER**
- **SUITABLE FOR LINED CARTON**

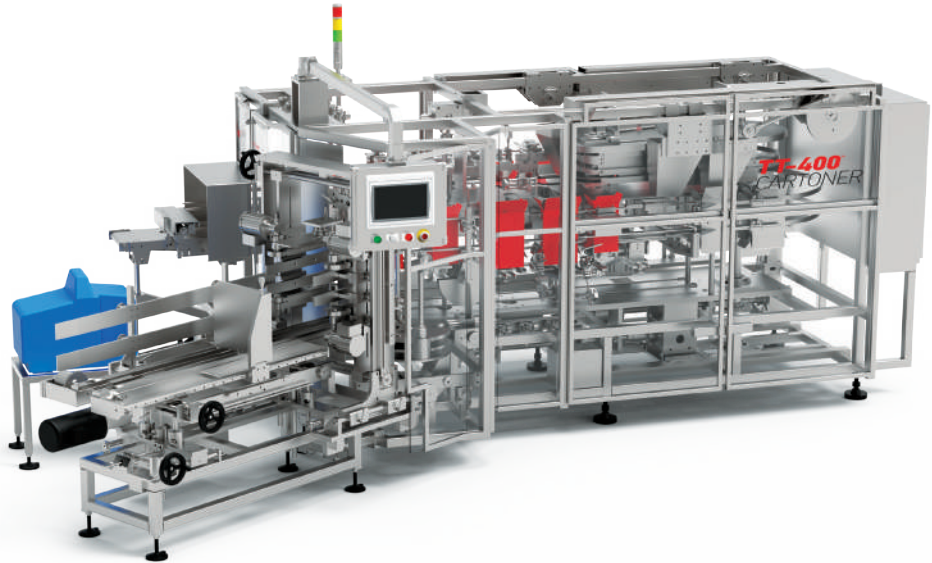


SPECIFICATION

MODE	Continuous Motion.
CARTON POCKET CENTER	4,6,8,10,12, or 16 inches.
SPEED	Variable to 750 CPM, depending upon application.
CARTON FEED	48+” powered carton magazin with rotary erector
CARTON CLOSING	Straight or reverse tuck, hot melt glue, tooling for special carton styles.
CARTON FILLING	Patented volumetric cup fillers or computer scale interface.
FRAME	Welded tubular stainless steel; Lexan cover panels with stainless steel frames and safety electrical interlocks.
DRIVE	Servo drive, with line shaft.
CONTROLS	Allen Bradley PLC or to customer spec; Allen Bradley components alphanumeric self-diagnostics.
ADJUSTMENTS	Lead screws with calibrated scale references.
DIMENSION	Request specific model floor plan.
POWER REQ'S	Wired to accommodate your plants electrical requirements.
AIR REQ'S	Approx. 6.5 CFM 60 psi depending upon application.
TOOLING	Available for tuck, glue and special carton styles.

TOP VIEW

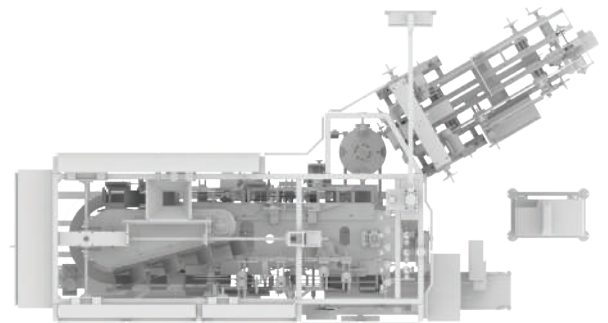

SIDE VIEW

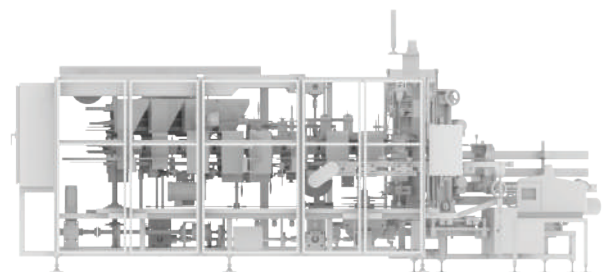

QUALITY MEANS EFFICIENCY