


XWZ300 Intelligent High Speed Cartoner

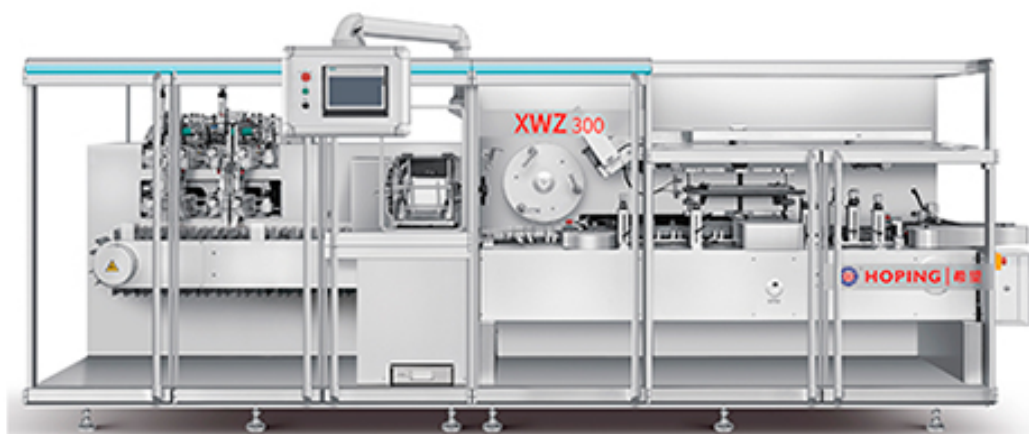

Cartoner XWZ300 is a continuous type of intelligent high-speed cartoning machine and is also suitable for food packaging, cosmetic packaging and packaging in related industries.

This cartoner is suitable for food packaging, chemical packaging and packaging of related industries, with a wide range of use, short mold adjustment time, easy assembly and debugging. And according to the different requirements of users, the products can be changed regularly. This cartoner is suitable for the production of single variety in large quantity, and can also meet the production of multiple varieties in small quantity. The discharge port of the cartoner can be matched with various types of banding machines.

Product Description

- The cover of this cartoner is made of high-quality 304 stainless steel and aluminum alloy tempered glass protective door. The aluminum alloy tempered glass protective door has built-in Schneider door magnetic switch (CE-certified). If the protective door is opened during the production process, the machine will automatically stop working to ensure the safety of the operators.
- The whole cartoner adopts continuous cartoning, and the cartoner is in smooth running condition for cartoning, and the noise and load of mechanical operation are minimized.
- The program adopts PLC for the whole process of automatic monitoring to ensure 100% qualified finished product output at the discharge port. And automatic counting is displayed on the screen.
- This cartoner adopts a number of highly reliable mechanical overload automatic protection devices, so that the cartoner can protect itself from damage in the event of an unexpected situation during operation.

- No need to change parts when changing products. Products can be directly converted through the adjustment mechanism, each adjustment part uses the grip to adjust the set screw for fastening, easy to operate.
- All parts in contact with drugs are made of stainless steel and non-toxic materials, in compliance with “GMP” requirements.
- Security:
 - If there is no carton, the blister will not enter the carton, and the whole machine will automatically stop and sound the alarm.
 - If there is no manual, the blister will not enter the carton and the empty carton will be rejected. The whole machine will stop automatically and sound the alarm.
 - If there is no blister board, the carton and manual will be waiting. The whole machine will stop automatically and sound the alarm.

Technical Data

Project		Parameter
Capacity		100-300 cartons/min
Product Dimension	Length	70-175 mm
	Width	35-70 mm
	Height	4-45 mm
Carton Dimension	Length	75-180 mm
	Width	40-75 mm
	Height	15-50 mm
Instruction Dimension	Length	100-320 mm
	Width	100-210 mm
Power		5 kW
Power Three-Phase Five-Wire		380V/50Hz