


TS2 Weighing Counting Machines

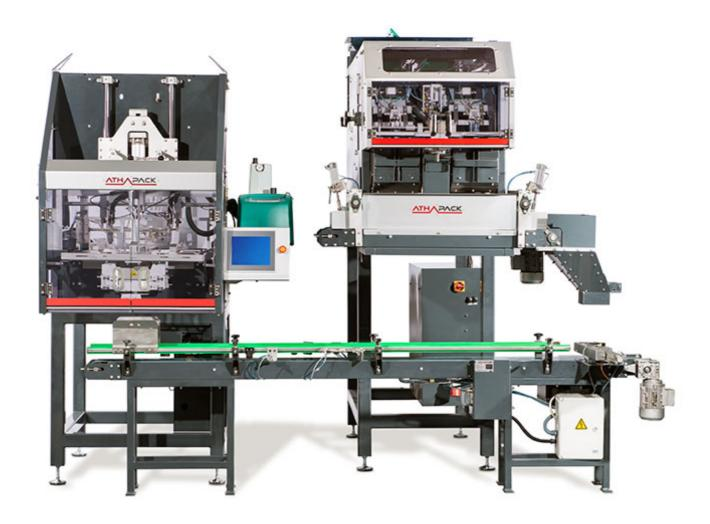

TS2 Weighing Counting Machine is suitable for weighing and counting products. The microprocessor continuously monitors the weighing system to guarantee the maximum speed.

General Features

Stainless steel or polyurethan lining, under customer request...

Feeding Hopper 40 It

- 2 Pcs. pre-feeding vibrating channels controlled by mobile detector.
- 2 Pcs. intermediary vibrating channels suitable to feed constantly rough channels and the fine-feed channels.
- 2 Pcs. rough channels with pneumatic flow restriction flaps.

Final weight by counting with rollers driven by D.C. motor and with microprocessor.

Weighing basket of 12 It with pneumatic driven opening system.

2 Pcs. Weigh heads equipped with load cell which is mecanically protected against overload.

Different programs can be registered for different products.

Adaptable for different machines (package, sack, box).

CE certificated

TS2 Weighing / Counting Weigher Technical Data	
Features	TS2
Mechanical Speed	Up To 15 cycle/min
	Screw Ø Min. M5, length min. 10 mm
Product	Screw Ø Max. M22, length max. 160 mm
	Nut Min. M6, max. M24
Weighing Range	500gr – 15kg
Power Consumption	6 kW
Voltage	380 V 3 Phase 50 Hz
Air Consumption	100 l/min
Air Pressure	Min 6 Bar
Weight	800 kg
Dimensions (Width x Length x Height)	1020 x 2625 x 2980 (mm)