

	W	L	H
Min. (mm)	80	60	60
Max. (mm)	300	450	180

BF20 Kutu Yapma Makinası, otomatik olarak kapaklı veya kapaksız kutuları kurar ve bir araya getirir. Makina karton haznesinden kartonları vakum emiciler vasıtası ile otomatik bir kol kaldırır. Kanatları sıcak tutkal püskürtme cihazı vasıtası ile yapıştırır. Karton oluştuktan sonra, konveyör boyunca taşınır. Format değişikliği, özel kolları ayarlayarak kolayca yapılır. Şekillendirme ünitesi, çok ayar yapmaktan kaçınmak için tek bir parça olarak yapılmıştır. Tüm ayarlar, hızlı ve kesin değişiklikleri sağlamak için mikroişlemci üzerinden yapılır. Tüm dolun, kapatma, kontrol ve etiketleme ihtiyaçlarını karşılamak üzere tasarlanmış ve üretilmiştir.

BF20 Box Forming Machine automatically sets up folded cartons and puts together boxes with or without cover. It consists of a carton magazine unit equipped with an automatic arm which lifts cartons from the magazine by means of suckers and of a hot glue spraying device for gluing flaps. Once the carton is formed it is transported along a conveyor. Format change can be easily done by just regulating the special handwheels. The forming unit - consisting of one single part - has been constructed in order to avoid regulating operations. All adjustments are set via microprocessor in order to assure quick and precise changes. It is designed and manufactured to satisfy all filling, closing, checking and labelling requirements.

Genel Özellikler

- Mekanik ve pnömatrik çalışabilme özelliği
- Boyalı çelik konstrüksiyon
- Vakumlu emicilerle donatılmış otomatik kolu karton haznesi
- Sıcak tutkal uygulaması ile kutu birleştirme.
- Elektrik eksenli ile şekillendirme kalıbı
- Ayarlanabilir dişli kalıp
- Sistem PLC ile kontrol edilir
- Güvenlik koruması CE normlarına uygundur
- CE standartlarına uygun olarak üretilmiştir.

General Specifications

- Mechanical and pneumatic operation
- Painted steel construction
- Carton magazine with automatic arm equipped with suckers with Venturi's system
- Box assembling through hot-melt glue application.
- Former's mould with electrical axis
- Adjustable Female mould
- Electric installation system controlled by a PLC
- Safety guards complying with CE rules


Teknik Özellikler

Hız	30 kutu/dk
Ürün genişliği	min. 80 mm - max 300 mm
Ürün uzunluğu	min. 60 mm - max 450 mm
Ürün yüksekliği	min. 60 mm - max 180 mm
Kurulu güç	2,5 kW - 3Faz 380 V 50 Hz
Basınçlı hava	6 bar
Hava tüketimi	100 lt./dk

Technical Specifications

Speed	up to 30 boxes/min
Product width	min. 80 mm - max 300 mm
Product length	min. 60 mm - max 450 mm
Product height	min. 60 mm - max 180 mm
Installed power	2,5 kW - 3Phase 380 V 50 Hz
Compressed air	6 bar
Air consumption	100 lt./min

KUTU YAPMA, DOLUM, KAPATMA VE KOLİLEME HATTI

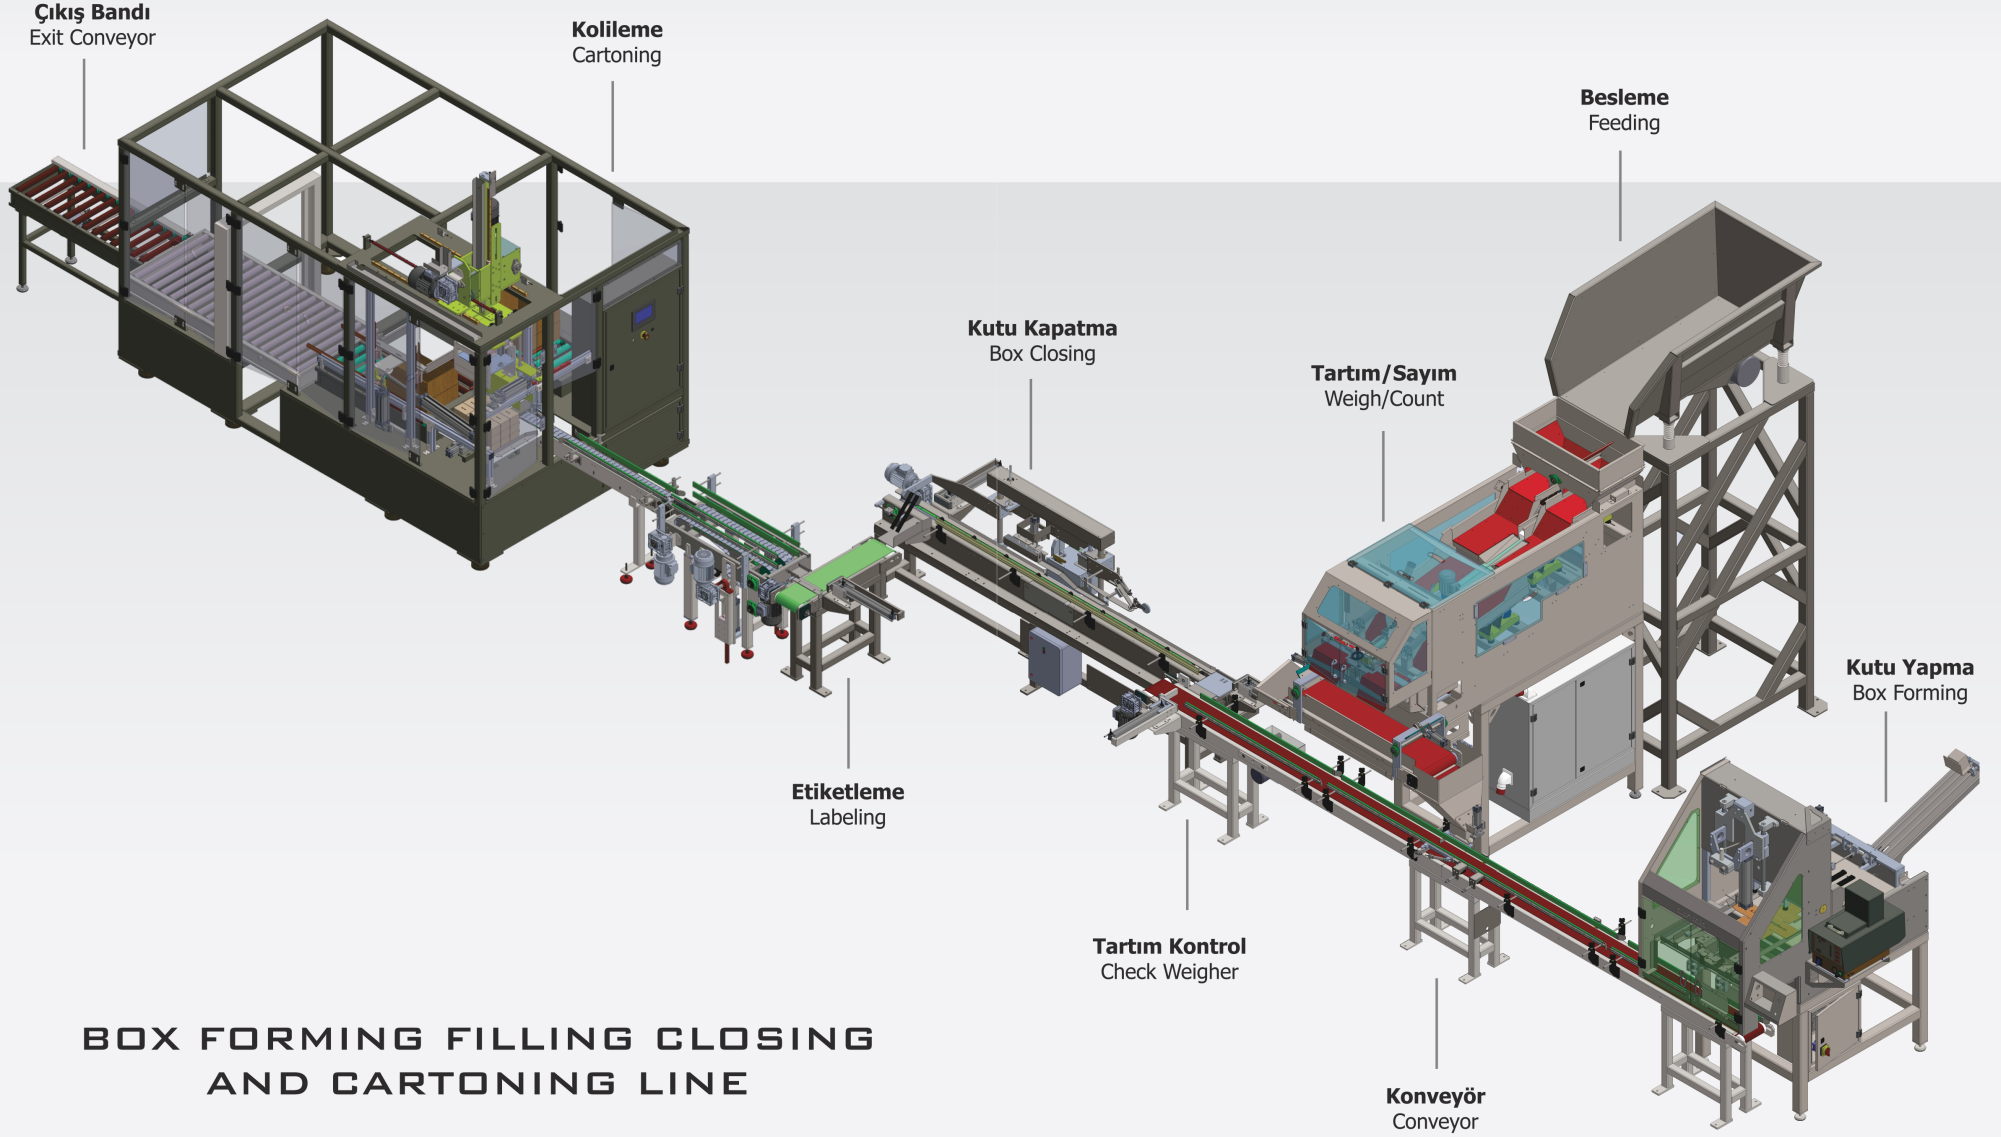

BOX FORMING FILLING CLOSING AND CARTONING LINE